
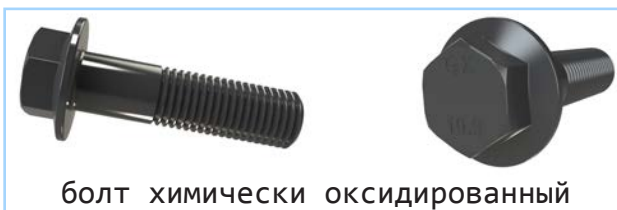


Болт с шестигранной головкой и фланцем DIN 6921
Класс прочности 8.8 10.9 12.9

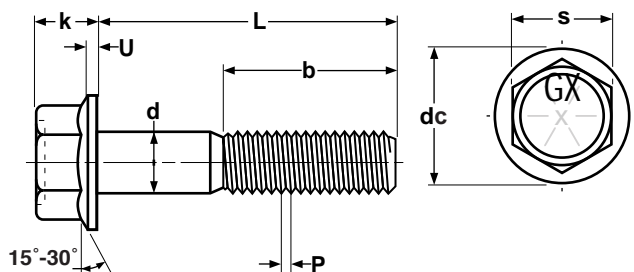

DIN 6921
8.8 10.9 12.9

d	M6	M8	M10	M12	M14	M16	M20
P	1	1.25	1,5	1.75	2	2	2.5
b	18	22	26	30	34	38	46
k(max)	6.6	8.1	9.2	11.5	12.8	14.4	17.1
s	10	13	15	16	18	21	27
dc(max)	14.2	18	22.3	26.6	30.5	35	43

L мм	M6	M8	M10	M12	M14	M16	M20
20	x	x	x	x	-	-	-
25	x	x	x	x	-	-	-
30	x	x	x	x	x	-	-
35	x	x	x	x	x	-	-
40	x	x	x	x	x	x	x
45	x	x	x	x	x	x	x
50	x	x	x	x	x	x	x
55	x	x	x	x	x	x	x
60	x	x	x	x	x	x	x
65	x	x	x	x	x	x	x
70	x	x	x	x	x	x	x
80	x	x	x	x	x	x	x
90	x	x	x	x	x	x	x
100	x	x	x	x	x	x	x
120	x	x	x	x	x	x	x